



OFFICE OF THE MARION COUNTY SURVEYOR  
SECTION RECORD CORNER  
SECTION 36 TOWNSHIP 17 RANGE 4  
DATE: 2-5-00  
PARTY CHIEF: Wilcoxon  
CREW: \_\_\_\_\_  
TYPE OF MARKER: Harrison  
METHOD OF ESTABLISHMENT: County: 8-16-95

IN. S.P.C. E ZONE, NAD 83

NAME: 17043601

N: 514641.5530(m)

E: 68663.9730(m)

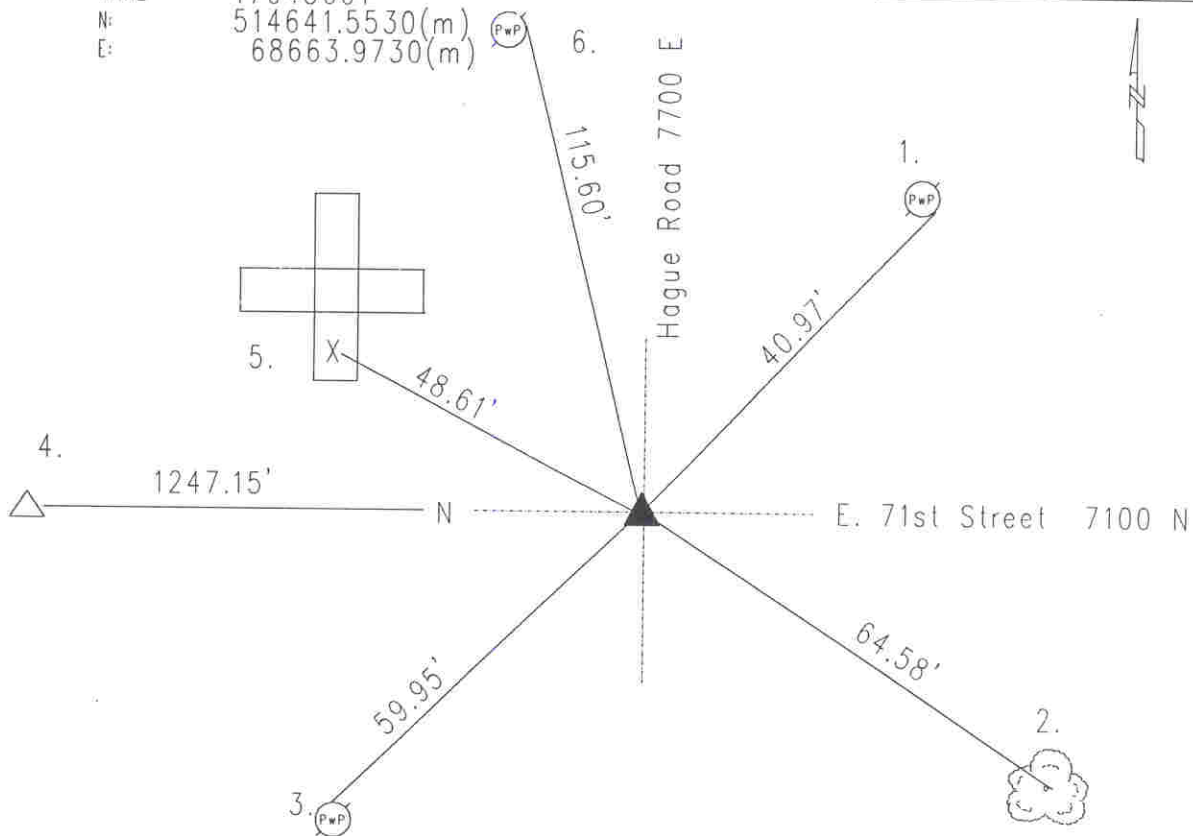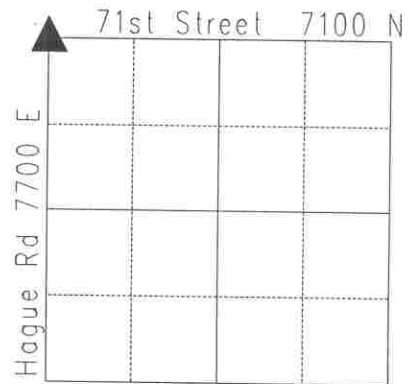

Original post set 1821 by Laughlin with no witnesses per Marion County Atlas pg. 9.  
2-27 & 28-1854 by Wilson called stone this location with witnesses: 36" black  
oak W 38 links and 24" black oak S 45 E 49 links per Lawrence Township Legal  
Survey Book, pg. 6. 12-28-1951 MCSO called stone. 12-28-51 called brass plug  
found 5 1/2" down over steel rod. 5-23-85 excavated found steel rod 5 1/2"  
down over stone down 21" over steel rod. Harrison set. Re-tied 2-5-00 by Wilcoxon.

HC743601

REF.	DISTANCE	DESCRIPTION
1.	40.97'	PK nail NE PwP#306-279 12"up
2.	64.58'	Mag nail w/brass washer W 20" ash 18"up
3.	59.95'	Mag nail w/brass washer NW PwP#40-279 15"up
4.	1247.15'	Due W to Q Q corner : mag nail w/brass washer set
5.	48.61'	Cut 'x' S-end of concrete sidewalk
6.	115.60'	Mag nail w/brass washer E PwP#389-279A 18"up